




DIESEL FUEL SYSTEM ANTIFOULANT

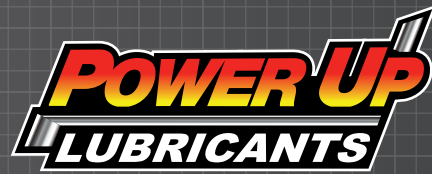

TECHNICAL INFORMATION

Black-Out™ Diesel Fuel System Antifoulant provides the following performance benefits:

- Prevents formation of black sludge
- Prevents filter plugging caused by thermal stressing within the engine
- Restores lost horsepower
- Reduces exhaust emissions
- Provides thermal and oxidative stability
- Cleans and prevents deposits formed in high pressure fuel injection systems
- Cleans and prevents injector deposits resulting from ULSD
- Improves and maintains power
- Improves and maintains fuel economy

Typical Properties

Properties	Results
Appearance	clear amber liquid
Specific Gravity, 15.6/15.6°C (60/60°F)	0.918
Density, lb/gal, 15.6°C, (60°F)	7.64
Flash Point, PMCC, °C (°F)	160 (71.1)
Pour Point, °C (°F)	<-40(<-40)
Viscosity, cSt @ 37.8°C (100°F)	9
20°C (68°F)	15
0° (32°F)	29
-17.8° (0°F)	61
-28.9° (-20°F)	109

Recommended Treat Rates

Black-Out™	Diesel Fuel	Black-Out™	Diesel Fuel
70ml	100 litres	2 oz.	26 gallons
355ml	500 litres	12 oz.	132 gallons
1 litre	1500 litres	1 quart	396 gallons
101 cc's	180 litres	101 cc's	40 gallons

Personal Safety, First Aid, Storage and Handling

See the Material Safety Data Sheet for product specific information